POWERGLIDE*
Midline Catheter

Benefits of the PowerGlide* Midline Catheter

- Peripheral catheter that is indicated for up to 29 days of infusion therapy
- Power injectable (5mL/sec)
- Flexible placement options: upper or lower arm



Indications For Use

The PowerGlide* Midline Catheter is inserted into a patient's vascular system for short-term use (<30 days) to sample blood or administer fluids intravenously. These catheters may be used for any patient population with consideration given to adequacy of vascular anatomy and appropriateness of the procedure. The PowerGlide* Midline Catheter is suitable for use with power injectors.

PowerGlide* Midline Catheter Contraindications

This device is contraindicated whenever:

- The presence of device-related infection, bacteremia, or septicemia is known or suspected.
- The patient's body size is insufficient to accommodate the size of the implanted device.
- The patient is known or is suspected to be allergic to materials contained in the device.
- Past irradiation of prospective insertion site.
- Previous episodes of venous thrombosis or vascular surgical procedures at the prospective placement site.
- Local tissue factors will prevent proper device stabilization and or access.

Therapies Not Appropriate for the PowerGlide* Midline Catheter


- Continuous Vesicants
- Parenteral Nutrition
- Solutions with pH < 5 and > 9
- Solutions greater than 600 mOsm/L

May be Appropriate for the PowerGlide* Midline Catheter	pH Scale	Inappropriate for the PowerGlide* Midline Catheter
	0	TPN
	1	Dopamine [pH 2.5]
	2	Vancomycin [pH 2.4 - 4.5]
	3	Phenergan [pH 4]
	4	Potassium [pH 4]
	5	
Ticaricillin [pH 5.5]	6	
Cefonocid [pH 6.5]	7	
Ceftriaxone [pH 6.7]	8	
Saline [pH 7]	9	
Hydration	10	
	11	
	12	
	13	
	14	

Catheter Identification


Catheter Length

The PowerGlide* Midline Catheter is a non-trimmable catheter, with the catheter length printed on top of the catheter hub, so you can easily identify where the tip of the catheter resides.



Catheter Name

Each PowerGlide* Midline Catheter has the name of the device printed right on the catheter hub, so there's no guessing what type of catheter you're dealing with.




Power Injection Rate

The maximum power injection flow rate is printed on the side of the catheter hub for quick reference. All PowerGlide* Midline Catheters are rated up to 325 psi.

Care and Maintenance

- Dressing Change Recommended:
  - Every 5-7 days or per facility protocol
- Flushing
  - 10 mL sterile normal saline after each use or every 12 hours or per facility protocol.
- Catheter removal
  - Remove slowly and do not use excessive force.
  - Use warm compress if needed

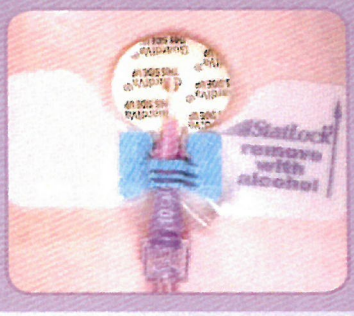

Please consult product labels and inserts for any indications, contraindications, hazards, warnings, cautions and instructions for use.

Bard Access Systems, Inc.
605 North 5600 West
Salt Lake City, UT 84116
801-522-5000
www.bardaccess.com

BARD | ACCESS SYSTEMS

*Bard and PowerGlide are trademarks and/or registered trademarks of C. R. Bard, Inc.
© 2013 C. R. Bard, Inc. All rights reserved.

MC-1105-01 1311R